


Alarm Unit DG 3200

Control And Monitor Standard Signals



The Alarm Unit DG 3200 is used to monitor limit values and regulate simple automation processes in 0(4) ... 20 mA and 0 ... 10 V standard signal circuits.

High reliability and Protective Separation are essential characteristics that contribute to fault-free equipment operation.

Two switch channels can be separately configured. The switch point and the switch hysteresis can each be adjusted by means of their own 12-turn potentiometer located on the unit's front panel. The switch state is indicated by a yellow LED.


The direction of effect and the mode of operation can be switched by means of DIP switch settings. Both switch outputs can be set up as either MIN or MAX alarms. The relay contacts switch high power loads either as N.O. or N.C. contacts.

Protective Separation and the 24 V AC/DC power supply make the DG 3200 universally applicable for all measurement and industrial applications, as well as for building automation.

- **Easy selection of operating mode**
MIN / MAX alarm switch selectable, switch point and hysteresis adjustable on front panel
- **Relay with high power handling**
or wearless optocoupler switching output
- **True 4-port separation**
Protection against erroneous measurements due to parasitic voltages or ground loops
- **Switch state indicated by LED**
Easy to adjust the set point and hysteresis
- **Protective Separation acc. to EN 50178**
Protects service personnel and downstream devices against impermissibly high voltage
- **High reliability and long-term stability**
No maintenance costs
- **Unlimited use with 24 V AC/DC power supply**
Universally applicable for all measurement and industrial applications
- **5 Years Warranty**
Defects occurring within 5 years from delivery date shall be remedied free of charge at our plant (carriage and insurance paid by sender)



Block diagram

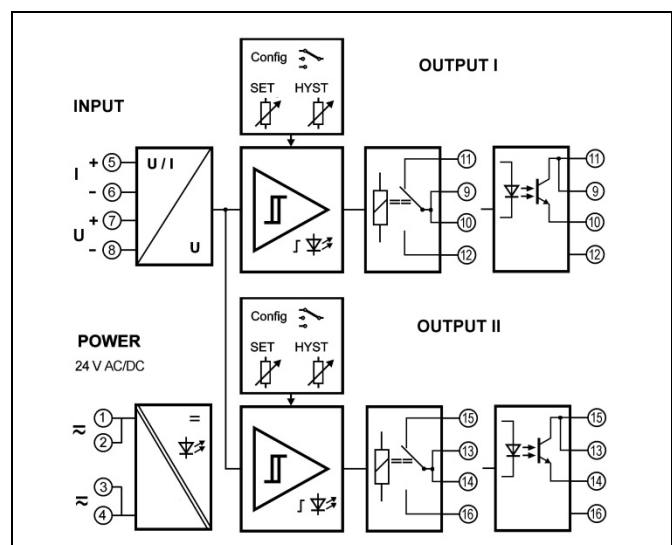

Technical Data


Input			
Input signal	0(4) ... 20 mA	± 20 mA	0 ... 10 V ± 10 V
Input resistance	Current input	ca. 5 Ω	
	Voltage input	ca. 1 MΩ	
Overload	Current input	≤ 200 mA	
	Voltage input	≤ 250 V	
Set point range	0 ... 100 % of input range with 12-turn potentiometer , MIN/MAX-Alarm switchable		
Hysteresis	0 ... 60 % of final value with 12-turn potentiometer		
Output			
DG 3200:	Contact type	2 SPDT relays, mode of operation switchable	
Relay	Switching capability AC max.	250 V / 6 A	1500 VA
	Switching capability DC max	250 V / 0,2 A	115 V / 0,3 A 30 V / 6 A
		Recommended minimum load 300 mW / 5 V / 5 mA	
DG 3280:	Contact type	2 optocoupler transistor switches, mode of operation switchable	
Optocoupler	Switching capability	30 V DC, max. 50 mA	
Switch state indicator	Yellow LED		
Response time	Approx. 20 ms		
General Data			
Set point error	< 0.2 % full scale		
Temperature coefficient ¹⁾	< 150 ppm/K		
Test voltage	4 kV AC, 50 Hz, 1 min. input against power supply against both switching outputs 2.5 kV AC, 50 Hz, 1 min. switching output I against switching output II		
Working voltage (Basic Insulation) ²⁾	600 V AC/DC for overvoltage category III and pollution degree 2 acc. to EN 50178 between input, power supply and switching outputs. Up to 300 V AC/D between both switching outputs		
Protection against electrical shock ²⁾	Protective separation according to EN 50178 by reinforced insulation up to 300 V AC/DC for overvoltage category II and pollution degree 2 between input, power supply and switching outputs		
Power supply	24 V AC/DC, ± 15 %	AC 48 ... 62 Hz, approx. 2 VA DC approx. 1 W	
Ambient temperature	Operation	- 20 to + 60 °C (- 4 to + 140 °F)	
	Transport and storage	- 35 to + 85 °C (- 31 to + 185 °F)	
EMC ³⁾	EN 61326-1		
Construction	22.5 mm (0.89") housing, protection class IP 20, mounting on 35 mm DIN rail acc. to EN 60715		
Weight	Approx. 100 g		

1) Average TC related to full scale value in specified operating temperature range, reference temperature 23 °C

2) For applications with high working voltages, ensure there is sufficient spacing or isolation from neighboring devices and protection against electric shocks.

3) Minor deviations possible during interference

Dimensions

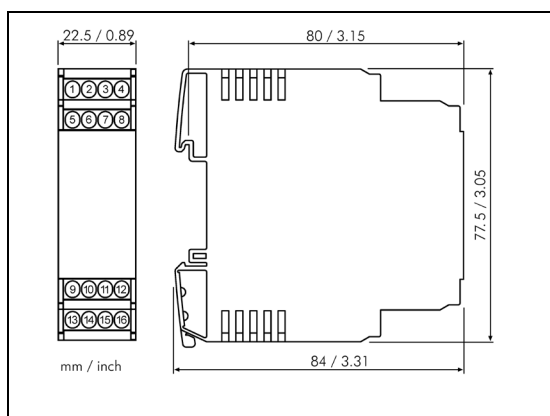

Subject to change!

Product line

Device	Order No.
Alarm Unit with relay contacts	DG 3200
Alarm Unit with transistor switches	DG 3280